



SIP SMARTER, STAY *Cooler.*



Hydrate Smarter With Our
Water Coolers!


WATER COOLER

Model	DC 25-T2	DC 45-T3
Storage Capacity (US GALLON)/Ltrs	9.1 USG/ 33.67 Ltrs	11.84 USG/ 43.80 Ltrs
Cooling Capacity per hour (US GALLON)/Ltrs	25 USG/ 92.5 Ltrs	45 USG/ 166.5 Ltrs
No. of Taps	2	3
Capacity of Fan Motor	10 W	10 W
Compressor Capacity (HP)	1/4	1/3
Dimensions H x D x W (mm)	545x410x1260	545x410x1260
Compressor Make	TECUMSEH (India) / DANFOSS (China) / EMMERSON (India)	
Specification Evaluator	220V-240V 50Hz BS1363A	
Inlet Temperature	40° Celsius	40° Celsius
Outlet Temperature	5° Celsius to 40° Celsius	
Refrigerant	R 134 A	R 134 A
Factory Injected P.O.	MDI & POLY I-20	MDI & POLY I-20
Grade of the Body Sheet - Face type side	430 BA Finish	430 BA Finish
Weight in KG	26	37
Loading Capacity in 40HQ	152	152



WATER COOLER

Model	DC 65-T3	DC 85-T4
Storage Capacity (US GALLON)/Ltrs	13.2 USG / 48.84 Ltrs	20 USG / 74 Ltrs
Cooling Capacity per hour (US GALLON)/Ltrs	65 USG / 240.5 Ltrs	85 USG / 314.5 Ltrs
No. of Taps	3	4
Capacity of Fan Motor	10 W	16 W
Compressor Capacity (HP)	1/3+	1/2
Dimensions H x D x W (mm)	830x430x1260	830x430x1260
Compressor Make	TECUMSEH (India) / DANFOSS (China) / EMMERSON (India)	
Specification Evaluator	220V-240V 50Hz BS1363A	
Inlet Temperature	40° Celsius	40° Celsius
Outlet Temperature	5° Celsius to 40° Celsius	
Refrigerant	R 134 A	R 134 A
Factory Injected P.O.	MDI & POLY I-20	MDI & POLY I-20
Grade of the Body Sheet - Face type side	430 BA Finish	430 BA Finish
Weight in KG	45	67
Loading Capacity in 40HQ	114	102

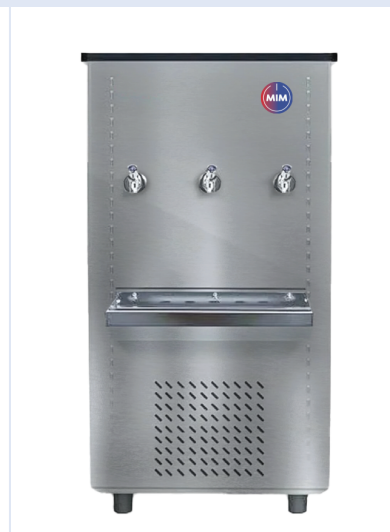

WATER COOLER

Model	DC 100-T5	DC 125-T5
Storage Capacity (US GALLON)/Ltrs	25 USG/ 92.5 Ltrs	29 USG/ 107.3 Ltrs
Cooling Capacity per hour (US GALLON)/Ltrs	100 USG/ 370 Ltrs	125 USG / 462.5 Ltrs
No. of Taps	5	5
Capacity of Fan Motor	16 W	25 W
Compressor Capacity (HP)	3/4	3/4
Dimensions H x D x W (mm)	980x520x1260	980x520x1260
Compressor Make	TECUMSEH (India) / DANFOSS (China) / EMMERSON (India)	
Specification Evaluator	220V-240V 50Hz BS1363A	
Inlet Temperature	40° Celsius	40° Celsius
Outlet Temperature	5° Celsius to 40° Celsius	
Refrigerant	R 134 A	R 134 A
Factory Injected P.O.	MDI & POLY I-20	MDI & POLY I-20
Grade of the Body Sheet - Face type side	430 BA Finish	430 BA Finish
Weight in KG	70	75
Loading Capacity in 40HQ	82	64



MIM

Making Innovation Meaningful.

